

## Data sheet

**Multi IO Extension Shutter 592**

Blind/Shutter control with one output of a KNX Multi IO



(Art. # 5322)

**Application area**

The Multi IO Extension Shutter 592 for shutter has been specially developed for the control of blinds and shutters. The double relay is connected to only one output of a KNX Multi IO 570 or 580. The direction control of the relay outputs is performed automatically by the KNX Multi IO by a defined voltage interruption of the holding current.

The outputs are electro-mechanically locked against each other to prevent a motor defect.

The Multi IO Extension Shutter 592 has an integrated fuse to protect high-quality equipment.

**Technical Specification**

Electrical safety

- Protection (acc. EN 60529): IP20

CE marking according to

- Low voltage directive 2014 / 35 / EU
- EMC directive 2014 / 30 / EU
- RoHS directive 2011 / 65 / EU
- EN 62368-1: 2020 + A11: 2020
- EN 50491-5-1: 2010
- EN 50491-5-2: 2010, EN 50491-5-3: 2010
- EN 61000-6-2: 2019
- EN 61000-6-3: 2007 + A1: 2011
- EN 63000: 2018

Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 ... 93 %

Mechanical data

- Housing: plastic (PC)
- DIN rail mounted device, width: 1 units (18 mm)
- Weight: approx. 50 g

Controls and indicators

- LEDs (green) show direction
- Glass fuse 5x20 mm, 6 A

Connectors

- Screw terminal (2 poles) for 24 V $\bar{\bar{=}}$  input
- Screw terminal (3 poles) for 230 V $\sim$  output
- Cross-section of connectors: 1.5 ... 2.5 mm $^2$

Output

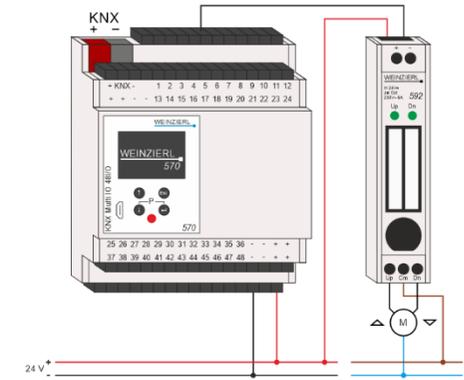
- Fuse max. 6 A
- Relay type: 250 V $\sim$  / 6 A
- Depending on load type (capacitive or inductive) the switching power can be reduced significantly.

Inputs

- Input voltage (signal) 24 V $\bar{\bar{=}}$
- Max. input current < 25 mA

**Installation Instructions**

- The device may be used for permanent interior installations in dry locations or within distribution boards with DIN rail.

**WARNING**

- The device must be mounted and commissioned by an authorized electrician.
- The prevailing safety rules must be heeded.
- The device must not be opened.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device is a permanently connected equipment: A readily accessible disconnect device shall be incorporated external to the equipment.
- The power rating is indicated on the top side of the product.

CE Declaration  
[www.weinzierl.de/en/products/592/ce-declaration](http://www.weinzierl.de/en/products/592/ce-declaration)

**KNX**  
 WEINZIERL ENGINEERING GmbH  
 Achatz 3-4  
 84508 Burgkirchen an der Alz  
 GERMANY

Tel.: +49 8677 / 916 36 – 0  
 E-Mail: [info@weinzierl.de](mailto:info@weinzierl.de)  
 Web: [www.weinzierl.de](http://www.weinzierl.de)