


## Data sheet

**KNX TP Blue IO 550 CV *secure***

KNX LED dimming actuator 4-fold with constant voltage

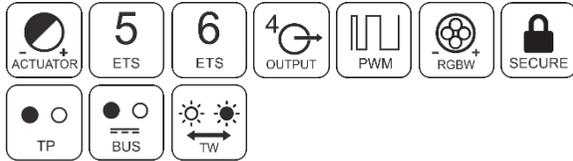

(Art. # 5377)

**Application area**

The KNX TP Blue IO 550 CV *secure* is a compact RGB / RGBW / Tunable White dimming actuator with 4 PWM outputs.

The dimming actuator can be used e.g. for LED panels or stripes with RGB / RGBW / Tunable White configuration or as 4 independent dimmer channels. Every configuration allows controlling the channel by switching, rel. dimming and dimming value.

Several comfort functions are integrated as well, including scenes, slumber fading, staircase light and sequencer.

Two push buttons and five LEDs allow a local operation and a visualization of the device state.

In addition to the output channels the device includes 16 independent functions for logic or timer control.

The device supports KNX Data Security.

**Technical Specification**

## Electrical safety



- Protection (acc. EN 60529): IP20
- Short circuit proof (electronic and non-reversible)
- Temperature fuse (electronic and non-reversible)

## CE marking according to

- EMC directive 2014 / 30 / EU
- RoHS directive 2011 / 65 / EU
- EN 63044-3: 2018
- EN 50491-5-1: 2010
- EN 50491-5-2: 2010, EN 50491-5-3: 2010
- EN 61000-6-2: 2019
- EN 61000-6-3: 2007 + A1: 2011
- EN 63000: 2018
- EN 55015: 2013 + A1: 2015
- EN 61547: 2009

## Environmental requirements

- Ambient temp. operating: - 5 ... + 45 °C
- Ambient temp. non-op.: - 25 ... + 70 °C
- Rel. humidity (non-condensing): 5 ... 93 %

## Mechanical data

- Housing: Transparent plastic
- Dimensions: 132 x 46 x 20 mm
- Weight: approx. 75 g

## Controls and indicators

- 2 buttons and 5 LEDs (multicolor)
- KNX programming button with LED (red)

## Power supply

- KNX bus approx. 5 mA

## Connectors


- Connector for KNX Bus (red / black)
- Pluggable screw connector (2 poles) for power supply
- Pluggable screw connectors (3 poles) for dimming channels 1/2 and 3/4
- Cross-section of connectors: 1.5 ... 2.5 mm<sup>2</sup>

## Output (dimming actuator)

- Dimmer for LEDs with constant voltage input
- PWM (frequency 480 / 600 Hz)
- Supply voltage: 12 ... 24 V<sub>~</sub>
- Max. load current: 6 A total, freely distributable
- Max. P<sub>out</sub>: 144 W

**Installation Instructions**

- The device may be used for permanent interior installations in dry locations or within furniture or suspended ceilings.

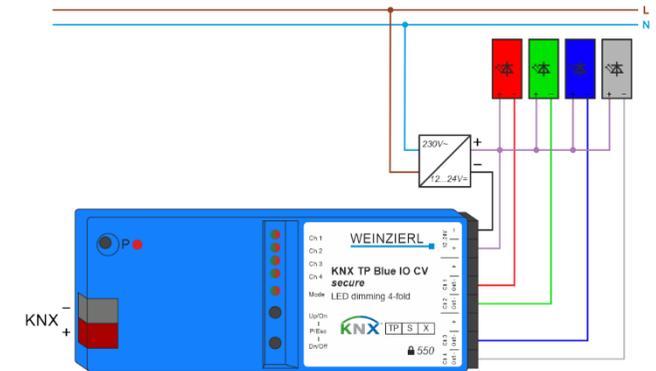**WARNING**

- The device must be mounted and commissioned by an authorized electrician.
- The prevailing safety rules must be heeded.
- The device must not be opened.
- For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The power rating is indicated on the back side of the product.

## Product database for ETS 5/6

[www.weinzierl.de/en/products/550/ets6](http://www.weinzierl.de/en/products/550/ets6)

## Manual

[www.weinzierl.de/en/products/550/manual](http://www.weinzierl.de/en/products/550/manual)

## CE Declaration

[www.weinzierl.de/en/products/550/ce-declaration](http://www.weinzierl.de/en/products/550/ce-declaration)



## WEINZIERN ENGINEERING GmbH

Achatz 3-4  
84508 Burgkirchen an der Alz  
GERMANY

Tel.: +49 8677 / 916 36 – 0  
E-Mail: [info@weinzierl.de](mailto:info@weinzierl.de)  
Web: [www.weinzierl.de](http://www.weinzierl.de)